




LED Lighting outdoor car park

To comply with the current standard for outdoor car parks, NEN-EN 12464-1:2021, the fixtures (e.g. LED floodlights) can be positioned as follows: On the long side one fixture per 6 parking spaces. Along the sides one fixture per 6 parking spaces. The mast height should be 6 meters. You should tilt the fixture 20° (relative to horizontal).



**Noxion LED Floodlight
Beam 40W 840 Assy.**

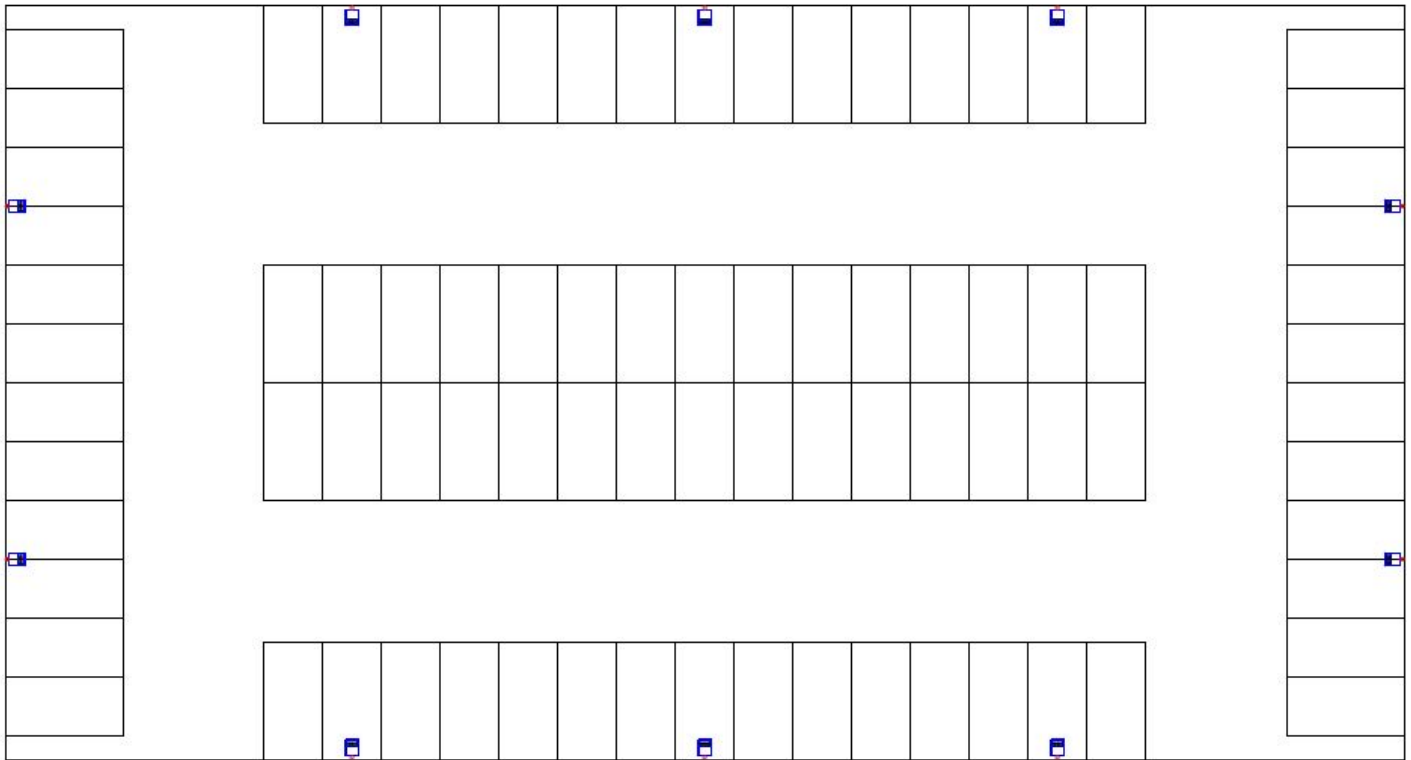

Standard proposal Private (Public)
Outdoor car park to the standard NEN-EN 12464-1:2021

Application areas	Norm NEN-EN 12464-2	
	Average illuminance (lux)	Evenness (Emin/Egem)
Lanes and parking spaces	10 lux on the floor	0,25



Customized Light plan?

The fastest lighting plan is a standard lightplan. The best lightplan is a customized lightplan. For a customized lightplan, contact our light specialists. For more info visit: www.noxion.com/en/wheretobuy